

CARD COLLECTOR

เครื่องรับบัตรจอดรถอัตโนมัติ



ทำหน้าที่รับคืนบัตรจอดรถ ณ จุดทางออก โดยทำงานร่วมกับระบบแกนกันอัตโนมัติ เพื่อควบคุมการเปิด-ปิด ณ ทางเข้าออก อย่างมีประสิทธิภาพ



Features

รองรับบัตรจอดรถแบบบัตรแข็ง
(บัตร Mifare Card)



แจ้งเตือนเมื่อมีค่าใช้จ่าย



ระบบเสียงแนะนำการใช้งาน



ปุ่มกดขอความช่วยเหลือ Intercom





ระบบสำรองไฟฟ้า



ปลอดภัยด้วยวัสดุอลูมิเนียม



Dimension

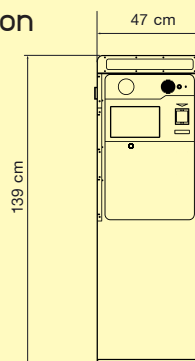

CARD COLLECTOR

เครื่องรับบัตรจอดรถอัตโนมัติ



Machine Technical Data


Component	
LCD Display :	TFT Module, LCD size 10.1 inch Resolution (H*V) 800 *1280 Pixels
Card Acceptor :	RFID Card ISO14443 (Mifare Card) Thickness 0.2-2mm
Intercom :	IP Intercom support Audio two way talk
Speaker :	3 inch 4 ohm 10W for voice announcement
Button :	2 Button OpenBarrier and CloseBarrier
IP Camera :	2 MP, 1920x1080 resolution (Record Please Add External NVR)

Interface	
LAN :	TCP/UDP Protocol 10/100 Mbps.
RS485 :	19200 bps
Control port :	Control 1 Barrier
Loop detect :	2 Channels vehicle loop detector
Output :	Signal Light Red ,Green 24VDC
Input :	Dry contact ,Radar,Photo Sensor

Capacity	
Card Box :	Maximum 400 Pcs

Electrical	
Power source :	220 VAC,50Hz
Power consumption :	100W
Power protection :	HB 10A 1.5kA
Power backup :	24V 5.5Ah

Environment	
Operating temperature :	10 °C to + 70 °C
Housing	
Height :	139 cm
Width :	47 cm
Depth :	55 cm
Material :	Aluminum composite
Cabinet finish :	Powder coat



Model	
Product code :	Product code PMS-CARDCOLLECTOR