

BLOCKER

อุปกรณ์กั้นช่องจอดรถอัตโนมัติ




Allow authorization for VIPs or member's parking in Office buildings to open the blocker and park. Automatically close by sensor when driver leaves.

Features




BLE communicate with Smart phone (Mobile Apps.).



Real time parking lot status update



Web base permission setting.



Fast Response with Cortex ARM32-bit MCU 30 MHz.




Blocker open /close speed within 10sec



Available for indoor parking




Dust proof.

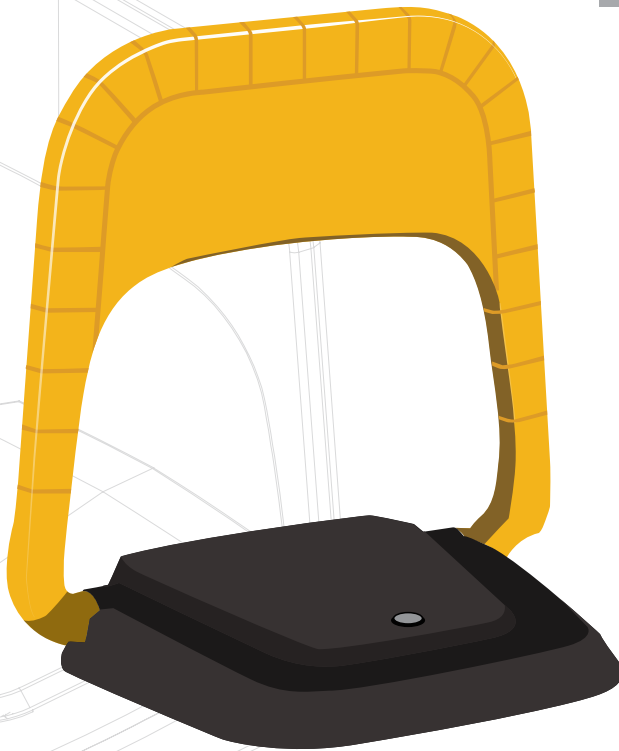

SPECIFICATIONS

Radio Range :	Bluetooth 4.0 BLE 2.4 - 2.48GHz. (Operation range 10 Meters-Indoor usage) LTE Cat NB1 900 MHz (Single Tone)
Radio Transmit Power / Sensitivity	23 dBm + 2 dB / -129 dBm + 1dB with antenna gain up to 2.15 dBi (Narrow band antenna) 7 dBm / -94 dBm (BLE)
IP Rating :	IP 68
Motor Type :	12 V Dc Motor / 0.7 N.m rated torque
Sensor type :	Magnetometer / Ultrasonic sensor Ambient Temperature Effect: Less than 0.5 milligauss/ °C Sensing Range: 60 cm maximum
Housing :	ABS / PC enclosure
Dimension :	W : 47.4 cm H : 47.7 cm D : 34.3 cm
Operating Conditions	-35°C to +70°C

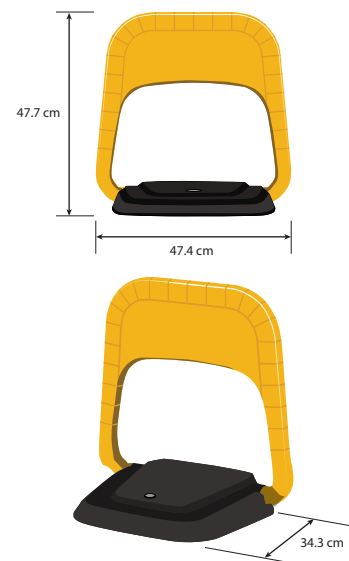

Model

Product code : ---